


4V10048-101A, Relay - Undervoltage, NSN: 5945-01-300-5836



Actual product may differ from image shown.

Product Overview:

- 3 Phase Average Sensing Circuit
- Continuous Duty
- 12 oz.
- Contact NPAS for specific needs and customizable options.

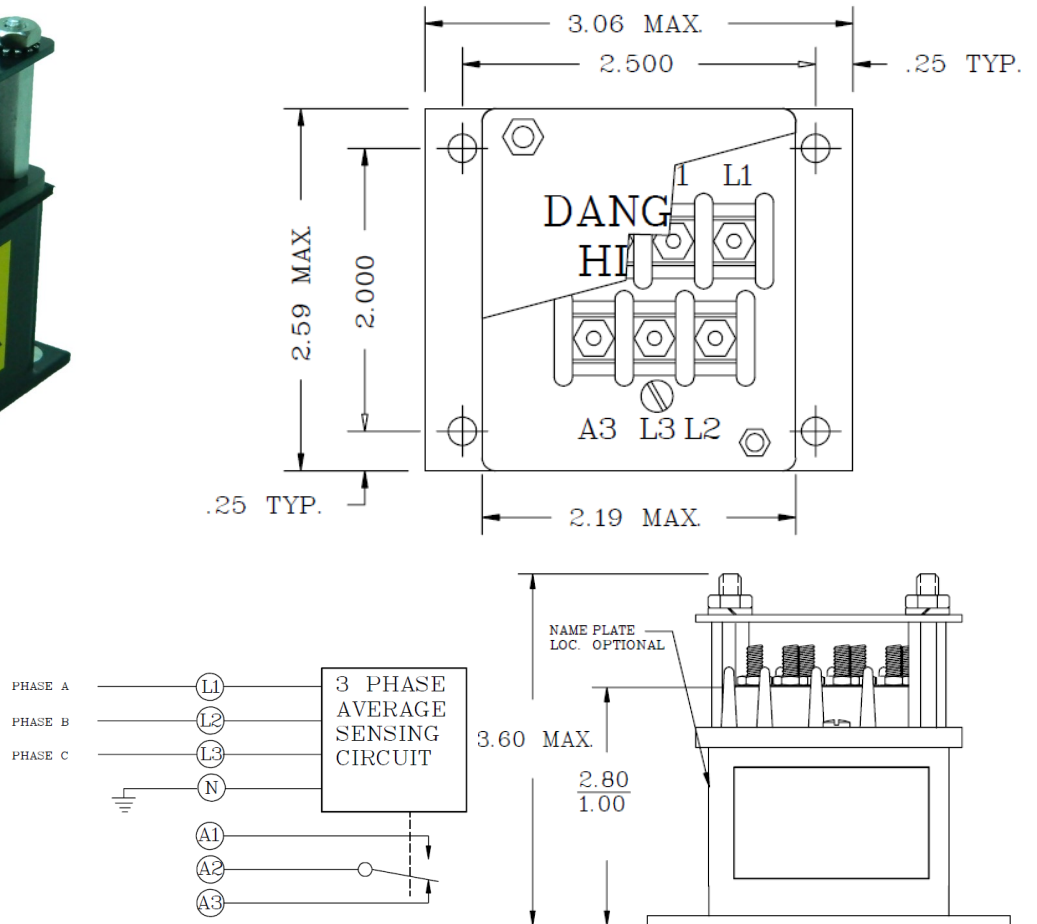

Performance Specifications

Coil Data		Contact Data						
Nominal Voltage	115 VAC, 400Hz	Arrangement	Main			Auxiliary		
Pickup	100 ±5 VAC		SPDT			N/A		
Dropout	95 ±5 VAC		Life (cycles)	28VDC (amps)	115VAC (amps)	Life (cycles)	28VDC (amps)	115VAC (amps)
Coil Resistance	-		-	-	-	-	-	-
Coil Current	-		50,000	1	-	-	-	-
Suppression	-	Resistive	-	-	-	-	-	-
Duty	Continuous	Inductive	50,000	.25	-	-	-	-
Electrical Data		Motor	-	-	-	-	-	-
Insulation Resistance	≥100MΩ @ 500VDC min	Lamp	50,000	.25	-	-	-	-
Dielectric Strength (sea level)		Rupture	-	-	-	-	-	-
Contacts to Ground	1050Vrms	Mechanical	100,000	-	-	-	-	-
Between contacts	1050Vrms	Voltage Drop	100mV					
Coil to Ground	1050Vrms	Contact Resistance	-					
Environmental		Timing	-					
Temperature range	-	Release	-					
Altitude	-	Transfer	-					
Shock	-	Bounce	-					
Vibration, sinusoidal	-	Mechanical Data	-					
		Weight	12 oz.					
		Specifications IAW	Meets materials and workmanship requirements of MIL-PRF-6106					