

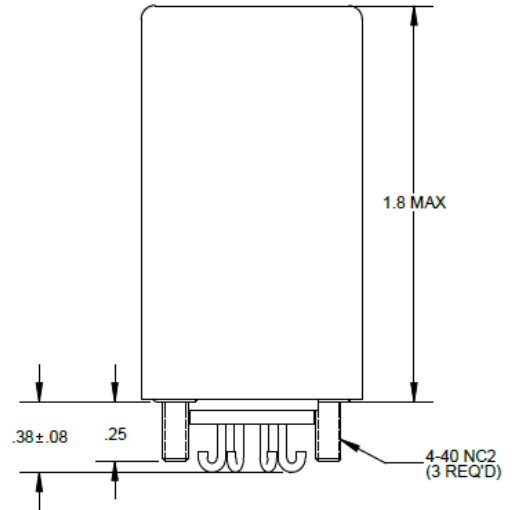


517335, 226BCC503 Relay, NSN: 5945-00-431-4943

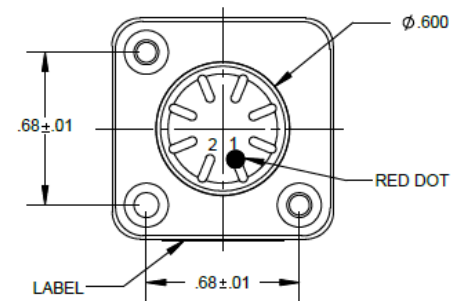

Product Overview:

- Low amperage activation
- 2 amps resistive load at 30VDC
- Contact NPAS for specific needs and customizable options.

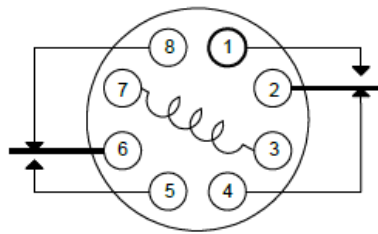

Performance Specifications

Coil Data		Contact Data						
Nominal Voltage	-	Arrangement Rating Resistive Inductive Motor Lamp Rupture Mechanical	Main			Auxiliary		
Pickup	9.0 mA max		DPDT			N/A		
Dropout	3.1 mA min		Life (cycles)	30VDC (amps)	200VAC (amps)	Life (cycles)	28VDC (amps)	115VAC (amps)
Coil Resistance	500Ω ± 10%		50,000	2	-	-	-	-
Coil Current	-		-	-	-	-	-	-
Suppression	-		-	-	-	-	-	-
Duty	-		-	-	-	-	-	-
Electrical Data				-	-	-	-	-
Insulation Resistance	≥10,000MΩ @ 500VDC min		100,000	-	-	-	-	
Dielectric Strength (sea level)		Voltage Drop						
Contacts to Ground	1050Vrms	Contact Resistance						
Between contacts	1050Vrms	Timing						
Coil to Ground	1050Vrms	Release						
Environmental		Transfer						
Temperature range	-	Bounce						
Altitude	-	Mechanical Data						
Shock	-	Weight						
Vibration, sinusoidal	-	Specifications IAW	Meets materials and workmanship requirements of MIL-PRF-5757					