

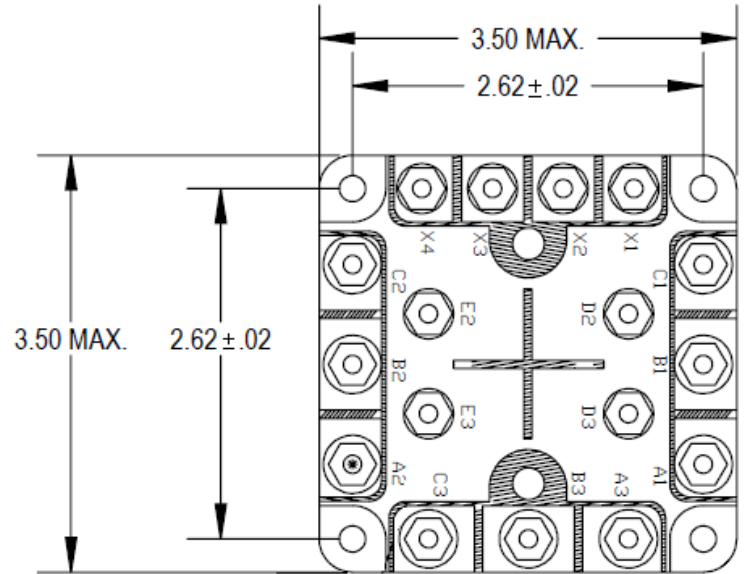


B-140BH-2017, Contactor, T.P.D.T. N.O., NSN: 5945-00-799-8484

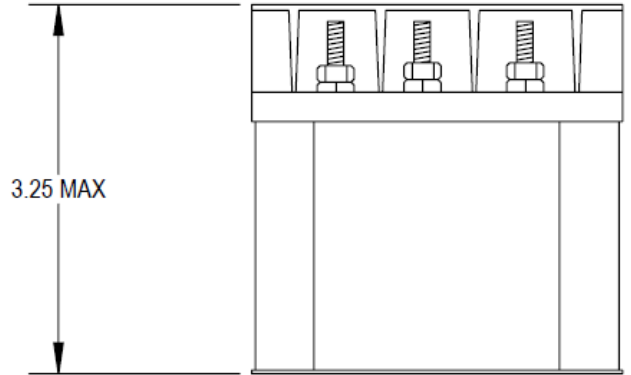

Product Overview:

- Mains, TPDT Center Off
- Auxiliaries, DPST N.C.
- Rated for 60 Amps, AC
- Contact NPAS for specific needs and customizable options.

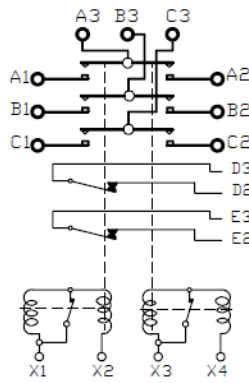

Performance Specifications

Coil Data		Contact Data					
		Main			Auxiliary		
		TPDT, N.O.			2DPST, N.C.		
		Life (cycles)	28VDC (amps)	200VAC (amps)	Life (cycles)	28VDC (amps)	115VAC (amps)
Nominal Voltage	28VDC						
Pickup	18VDC max						
Dropout	10 - 1.5 VDC						
Coil Resistance	-	50,000	-	60	50,000	2	1
Coil Current	Inrush - 5 amps, Hold - .5amps	50,000	-	60	-	-	-
Suppression	-	50,000	-	25	-	-	-
Duty	Continuous, economizing	-	-	-	-	-	-
		-	-	600	-	-	-
		100,000	-	-	-	-	-
Insulation Resistance	≥100MΩ @ 500VDC min	125mV, initial					
Dielectric Strength (sea level)		-					
Contacts to Ground	1500Vrms	-					
Between contacts	1500Vrms	-					
Coil to Ground	1050Vrms	-					
Temperature range	-55°C to +120°C	-					
Altitude		-					
Shock		-					
Vibration, sinusoidal		-					
Arrangement		1 lb. 8 oz.					
Rating		Meets materials and workmanship requirements of MIL-PRF-6106					
Resistive							
Inductive							
Motor							
Lamp							
Rupture							
Mechanical							
Voltage Drop							
Contact Resistance							
Timing							
Release							
Transfer							
Bounce							
Mechanical Data							
Weight							
Specifications IAW							