

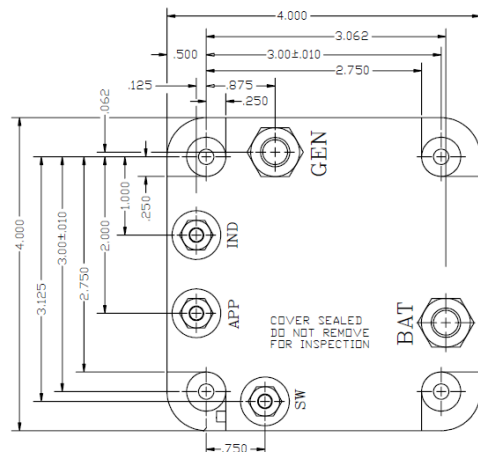


## G-1052-AQ4-C, Cutout—Reverse Current NSN: 2925-00-983-7521

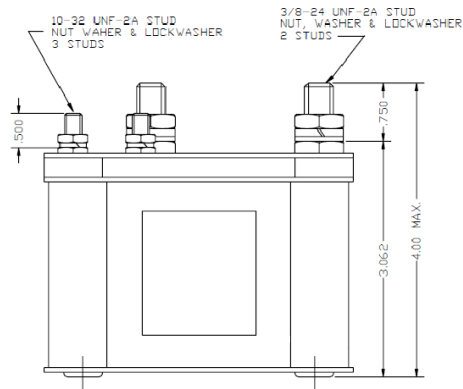

### Product Overview:

- Reverse Current Cut-out 6—17 amps
- .85 ± .15 VDC Differential Pick-up
- Meets many requirements of MIL-PRF-6106
- Contact NPAS for specific needs and customizable options.

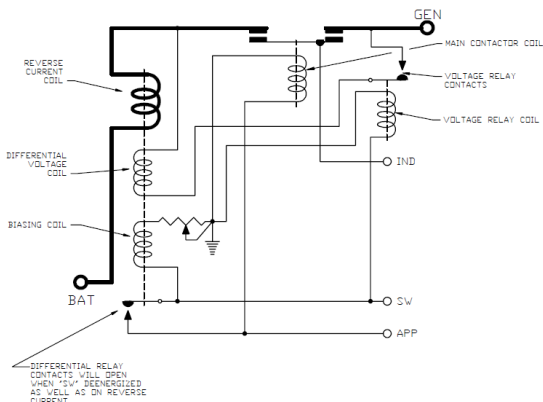

## Performance Specifications

Coil Data		Contact Data					
Calibrated at	12 ±1 amps @ 28VDC	Main			Auxiliary		
Diff. Voltage	.85VDC ±.15VDC	SPST DB			N/A		
Unexcited bus	-	Life (cycles)	28VDC (amps)	115VAC (amps)	Life (cycles)	28VDC (amps)	115VAC (amps)
Coil Resistance	-	50,000	200	-	-	-	-
Reverse Current	6 - 17amps @ 28VDC	Inductive	-	-	-	-	-
Suppression	-	Motor	-	-	-	-	-
Duty	Continuous	Lamp	-	-	-	-	-
Electrical Data		Rupture	-	4500	-	-	-
Insulation Resistance	≥100MΩ @ 500VDC min	Mechanical	100,000	-	-	-	-
Dielectric Strength (sea level)	1050Vrms	Voltage Drop	125mV				
Contacts to Ground	1050Vrms	Contact Resistance	-				
Between contacts	1050Vrms	Timing	-				
Coil to Ground	1050Vrms	Release	-				
Environmental		Transfer	-				
Temperature range	-	Bounce	-				
Altitude	-	Mechanical Data	-				
Shock	-	Weight	2 lb. 15 oz.				
Vibration, sinusoidal	-	Specifications IAW	Meets materials and workmanship requirements of MIL-PRF-6106				