





G-1152-B460-C, AC Power Contactor, 250 Amps 120/208V, 6PDT N.O., NSN: 5945-00-675-7412

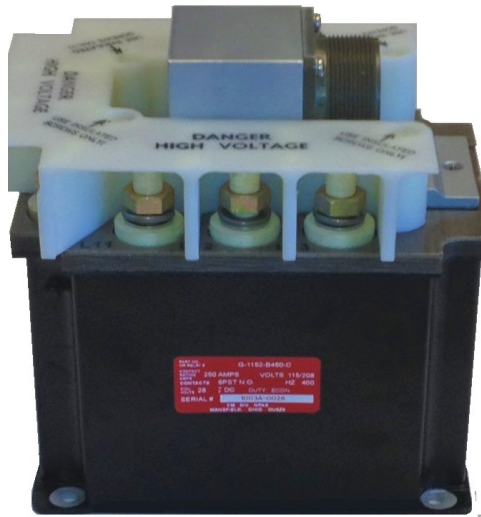

Actual product may differ from image shown.

Product Overview:

- 6PDT N.O. Main Contacts
- 6PST N.O. and 6PST N.C. Auxiliaries
- Rated for 250 Amps, AC
- Economized Coil
- Contact NPAS for specific needs and customizable options.

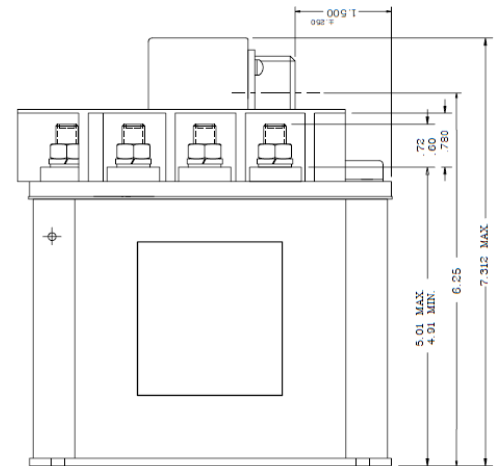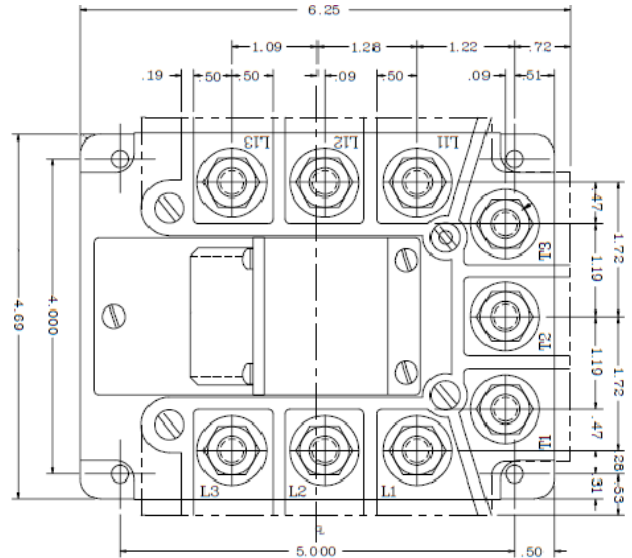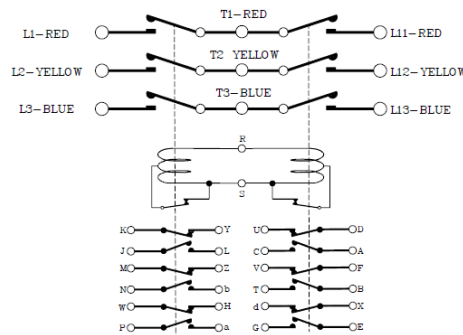

Performance Specifications

Coil Data		Contact Data						
Nominal Voltage	18 - 30 VDC	Arrangement	Main			Auxiliary		
Pickup	18VDC max		6PDT NO			6PST NO - 6PST NC		
Dropout	7 - 1 VDC	Rating	Life (cycles)	28VDC (amps)	208VAC (amps)	Life (cycles)	28VDC (amps)	115VAC (amps)
Coil Resistance	-	Resistive	50,000	-	250	50,000	6	6
Coil Current	Inrush - 12a max, Hold - 1.2a max	Inductive	50,000	-	250	50,000	6	6
Suppression	-	Motor	-	-	-	-	-	-
Duty	Continuous, economizing	Lamp	-	-	-	50,000	3	3
Electrical Data		Rupture	-	-	1750	-	-	-
Insulation Resistance	≥100MΩ @ 500VDC min	Mechanical	100,000	-	-	-	-	-
Dielectric Strength (sea level)		Voltage Drop	125mV					
Contacts to Ground	1500Vrms	Contact Resistance	-					
Between contacts	1500Vrms	Timing	-					
Coil to Ground	1050Vrms	Release	-					
Environmental		Transfer	-					
Temperature range	-65°F to +160°F	Bounce	-					
Altitude	-	Mechanical Data						
Shock	-	Weight	7 lb. 8 oz.					
Vibration, sinusoidal	-	Specifications IAW	Qualification testing to Lockheed 695795					